

AEON

HOLLOW RUBBER SPRINGS

SUSPENSION KIT FOR LAND ROVERS


Approved by the
Rover Company Limited
for use with the



**LAND-
ROVER**

PROGRESSIVE SUSPENSION

—whatever the load!

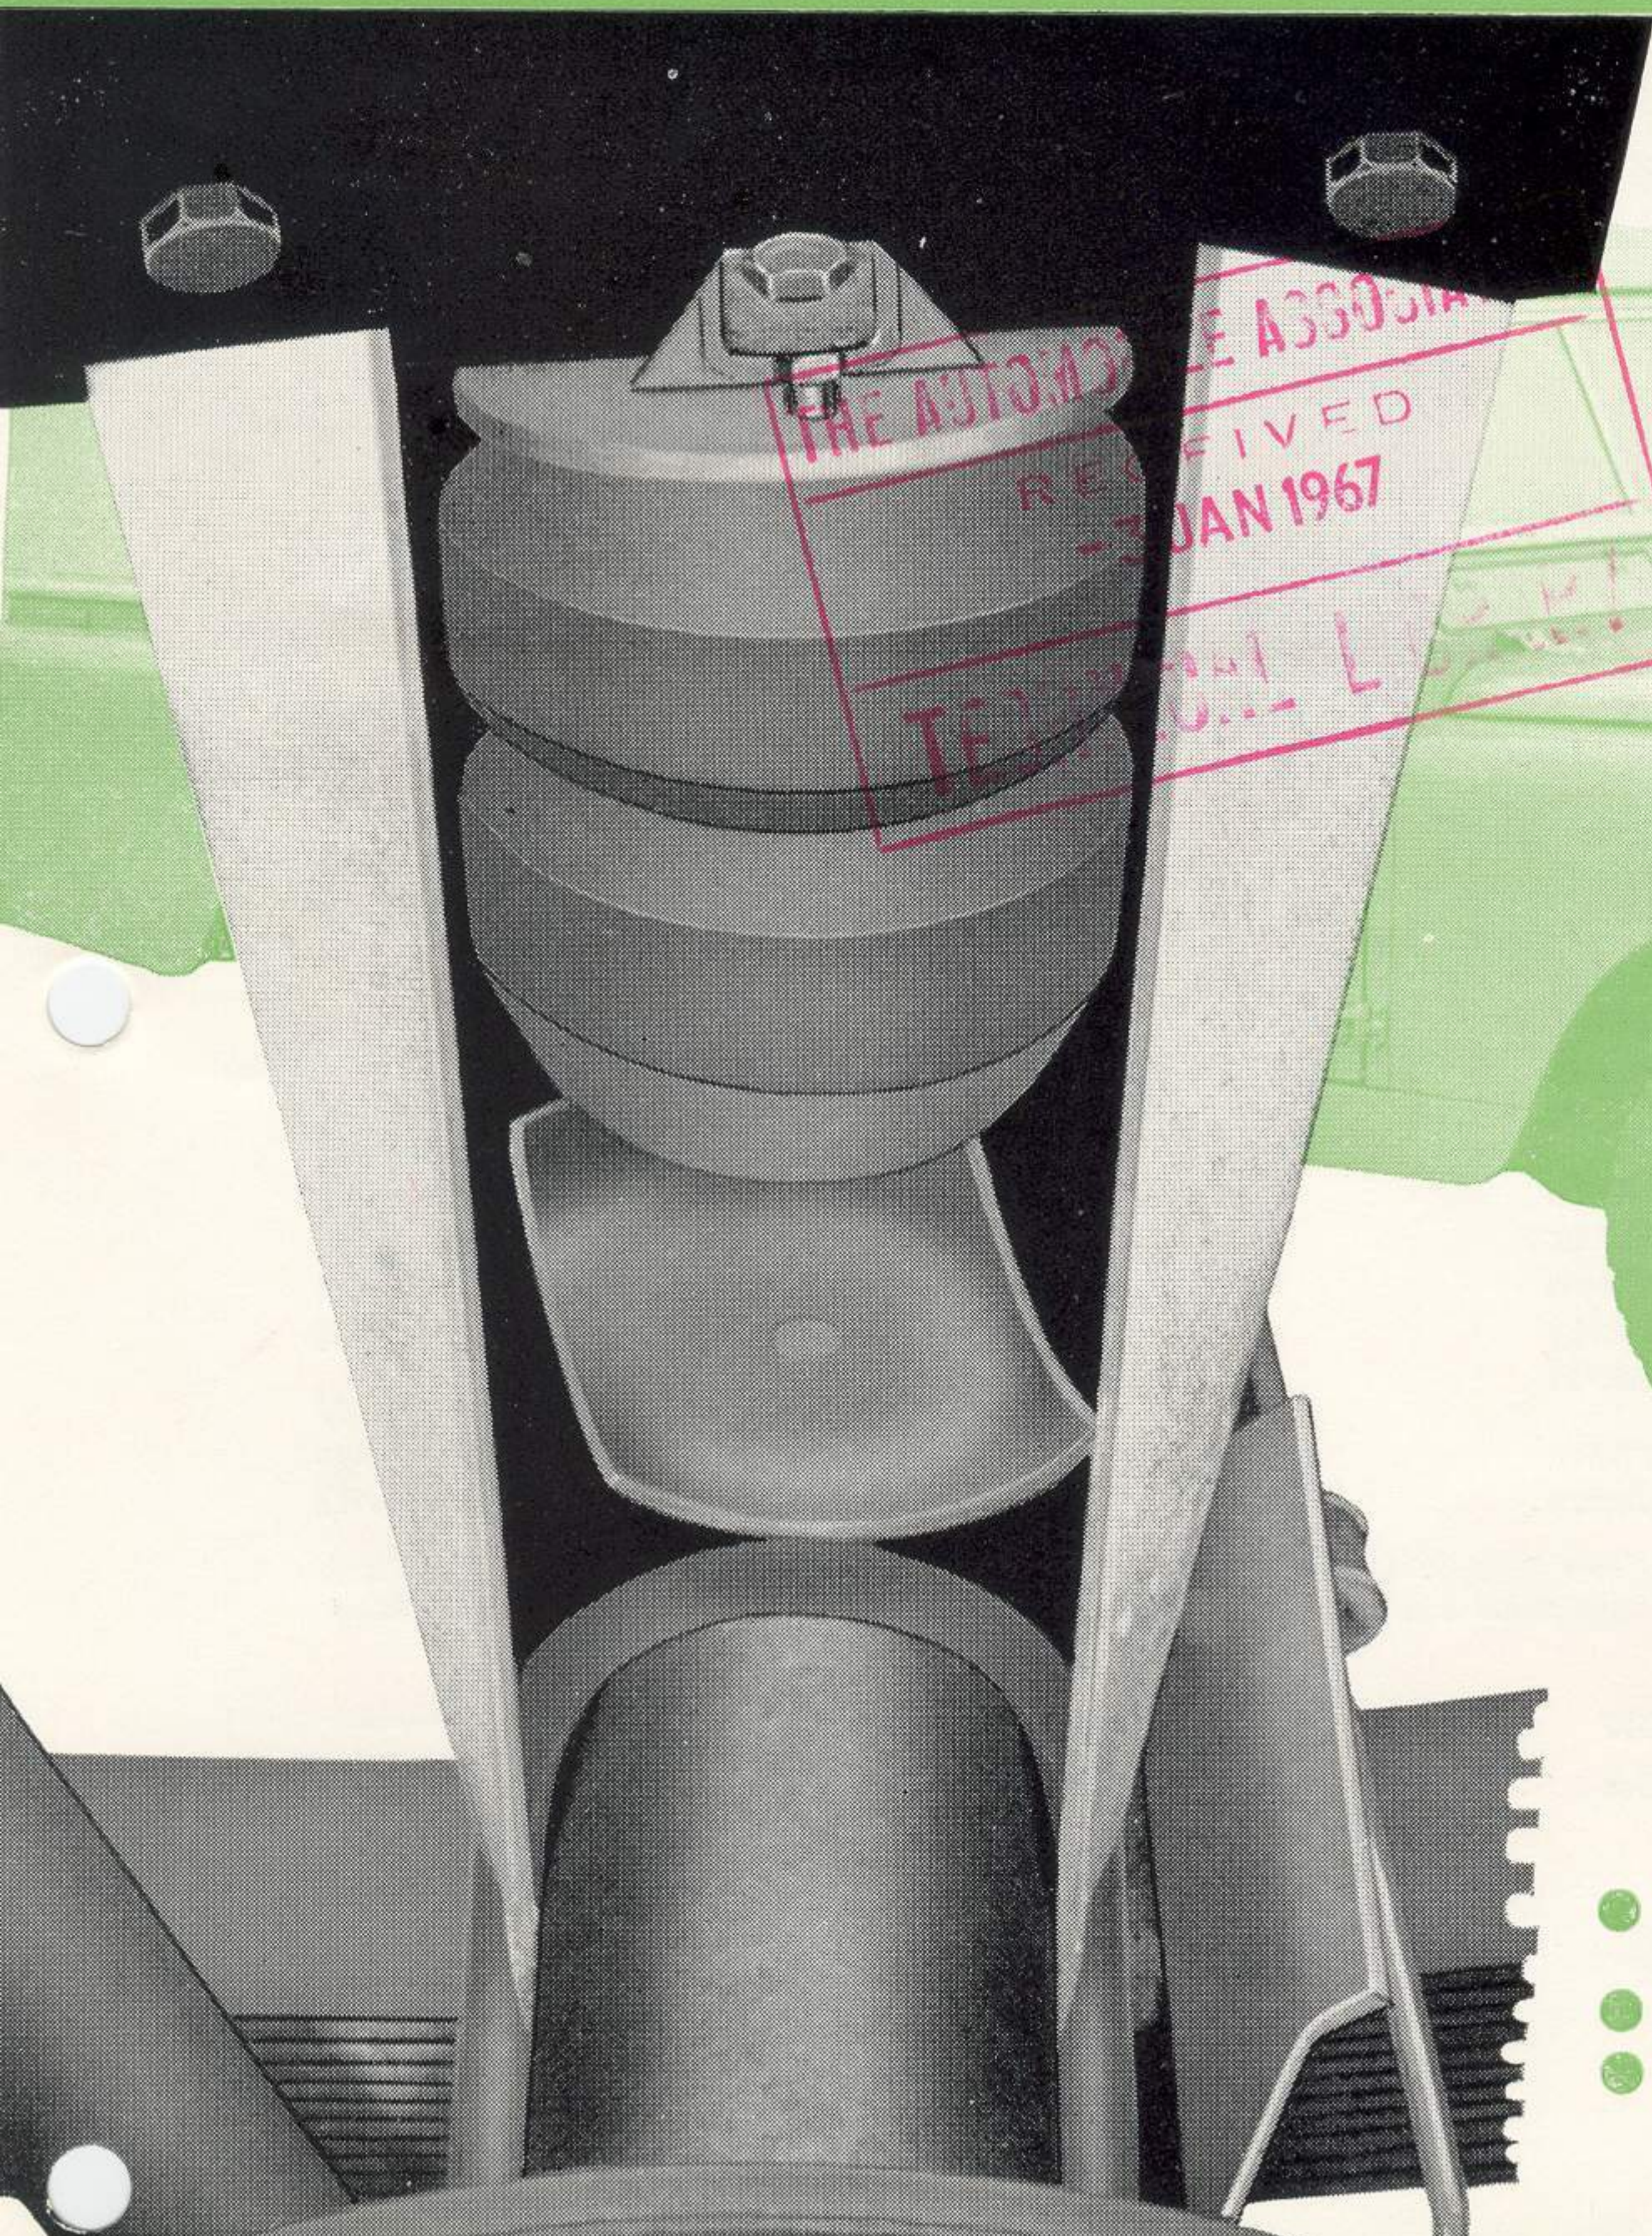

The hollow rubber spring replaces the rear axle bump rubber and assists the leaf spring suspension by supporting part of the vehicle weight. On a laden vehicle, ride and appearance are improved and sideways roll is reduced.

Recommended for use where:—

- The Land Rover regularly carries more than 50% of its pay-load.
- The centre of gravity is unavoidably high.
- Operating conditions are severe.

Use of these springs does not allow an increase in pay-load.


AEON PRODUCTS (LONDON) LTD.

11 NORTHDOWN STREET LONDON, N.1., ENGLAND

Telephone: TERMINUS 9875-7 TERMINUS 8055 STD. 01

Telegrams: AEONRUBBER, LONDON, N1 Cables: AEONRUBBER, LONDON, N1

S P E C I F I C A T I O N

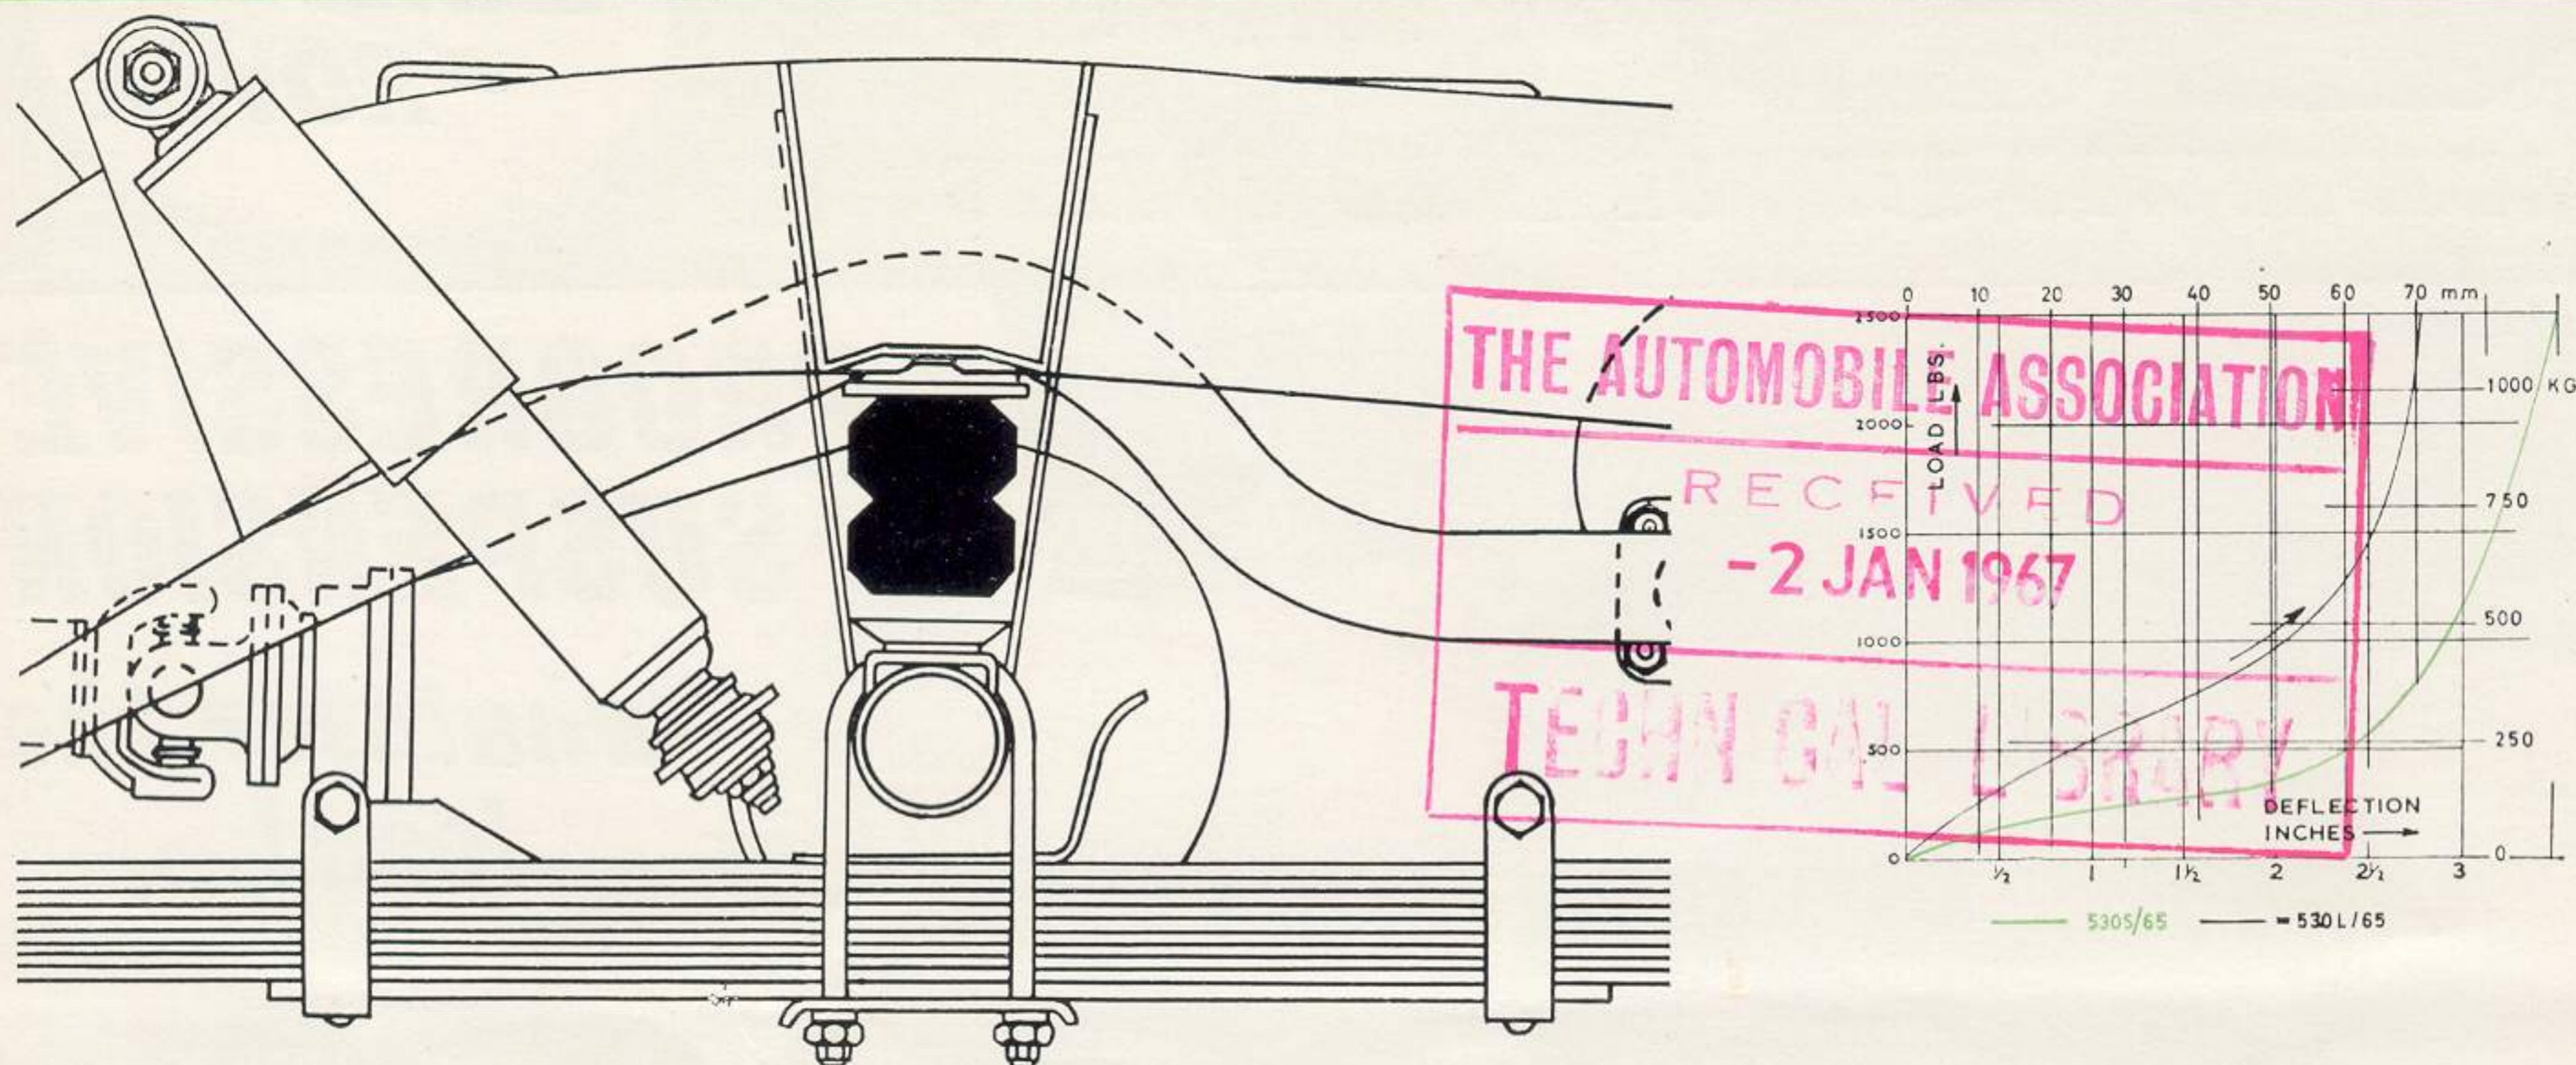

APPLICABILITY REAR AXLE ONLY 109" WHEELBASE LAND-ROVERS

- (1) For vehicles that are permanently fully laden Aeon Hollow Rubber Spring—Part No. 530S/65—may be fitted with heavy duty suspension. **Kit No. 44**
- (2) For vehicles that are laden above 10 cwt. (1,120 lbs.) (509 kgs.) either permanently or for a large part of their operating time, Aeon Hollow Rubber Spring—Part No. 530S/65 may be used with normal suspension. **Kit No. 44**
- (3) For vehicles which are special purpose personnel carriers, i.e., Ambulances, Aeon

NOTE: (1) It should be noted that with Aeon Hollow Rubber Springs fitted the ride in the unladen condition will be hard.
(2) Front axle rubber springs are available, but their use is restricted to special conversions approved by The Rover Co. Ltd.

STANDARD EXPORT SHIPPING SPECIFICATION

Aeon Hollow Rubber Spring Land Rover Assemblies

Packed in cartons—each
 Gross Weight: 7½ lbs. (3.409 kg.)
 Nett Weight: 7 lbs. (3.181 kg.)
 Dimensions: 9½" x 7½" x 4¾" (237 x 187 x 118 mm.)

One T/Chest containing 18 sets as above—
 Gross Weight: 149 lbs. (67.727 kg.)
 Nett Weight: 135 lbs. (61.363 kg.)
 Nett Nett Weight: 126 lbs. (57.272 kg.)
 Dimensions: 19" x 19" x 24" (48 x 48 x 60 cm.)

Hollow Rubber Spring—Part No. 530L/65—may be fitted together with heavy duty suspension. **Kit No. 42**

88" WHEELBASE LAND-ROVERS

- (1) For vehicles which are fully laden, either permanently or for a large part of their operating time, Aeon Rubber Springs—part No. 530S/65—may be used with normal suspension. **Kit No. 44**
- (2) For personnel transportation in heavy duty operation areas—Aeon Hollow Rubber Springs—Part No. 530L/65—may be used. **Kit No. 42**

FITTING—Remove existing bump stop by loosening bolts and brackets. Replace existing bracket with Aeon assembly, re-use existing bolts and nuts. Tack-weld Aeon cup to axle bump pad. Approximate fitting time per vehicle—2 hours.

The Rover Company Limited is not responsible for the manufacture of approved equipment and/or bodywork, although they have closely examined specifications and design. Matters concerning Sales (including Shipping, Delivery, etc.) Service or Warranty Claims are the responsibility of the manufacturer (whose name and address is given on this leaflet) or his agent. In cases of difficulty concerning approved equipment, the Special Projects Section of the Land-Rover Engineering Department is available to offer advice.

LAND-ROVER EXTRAS REQUIRED — NIL