

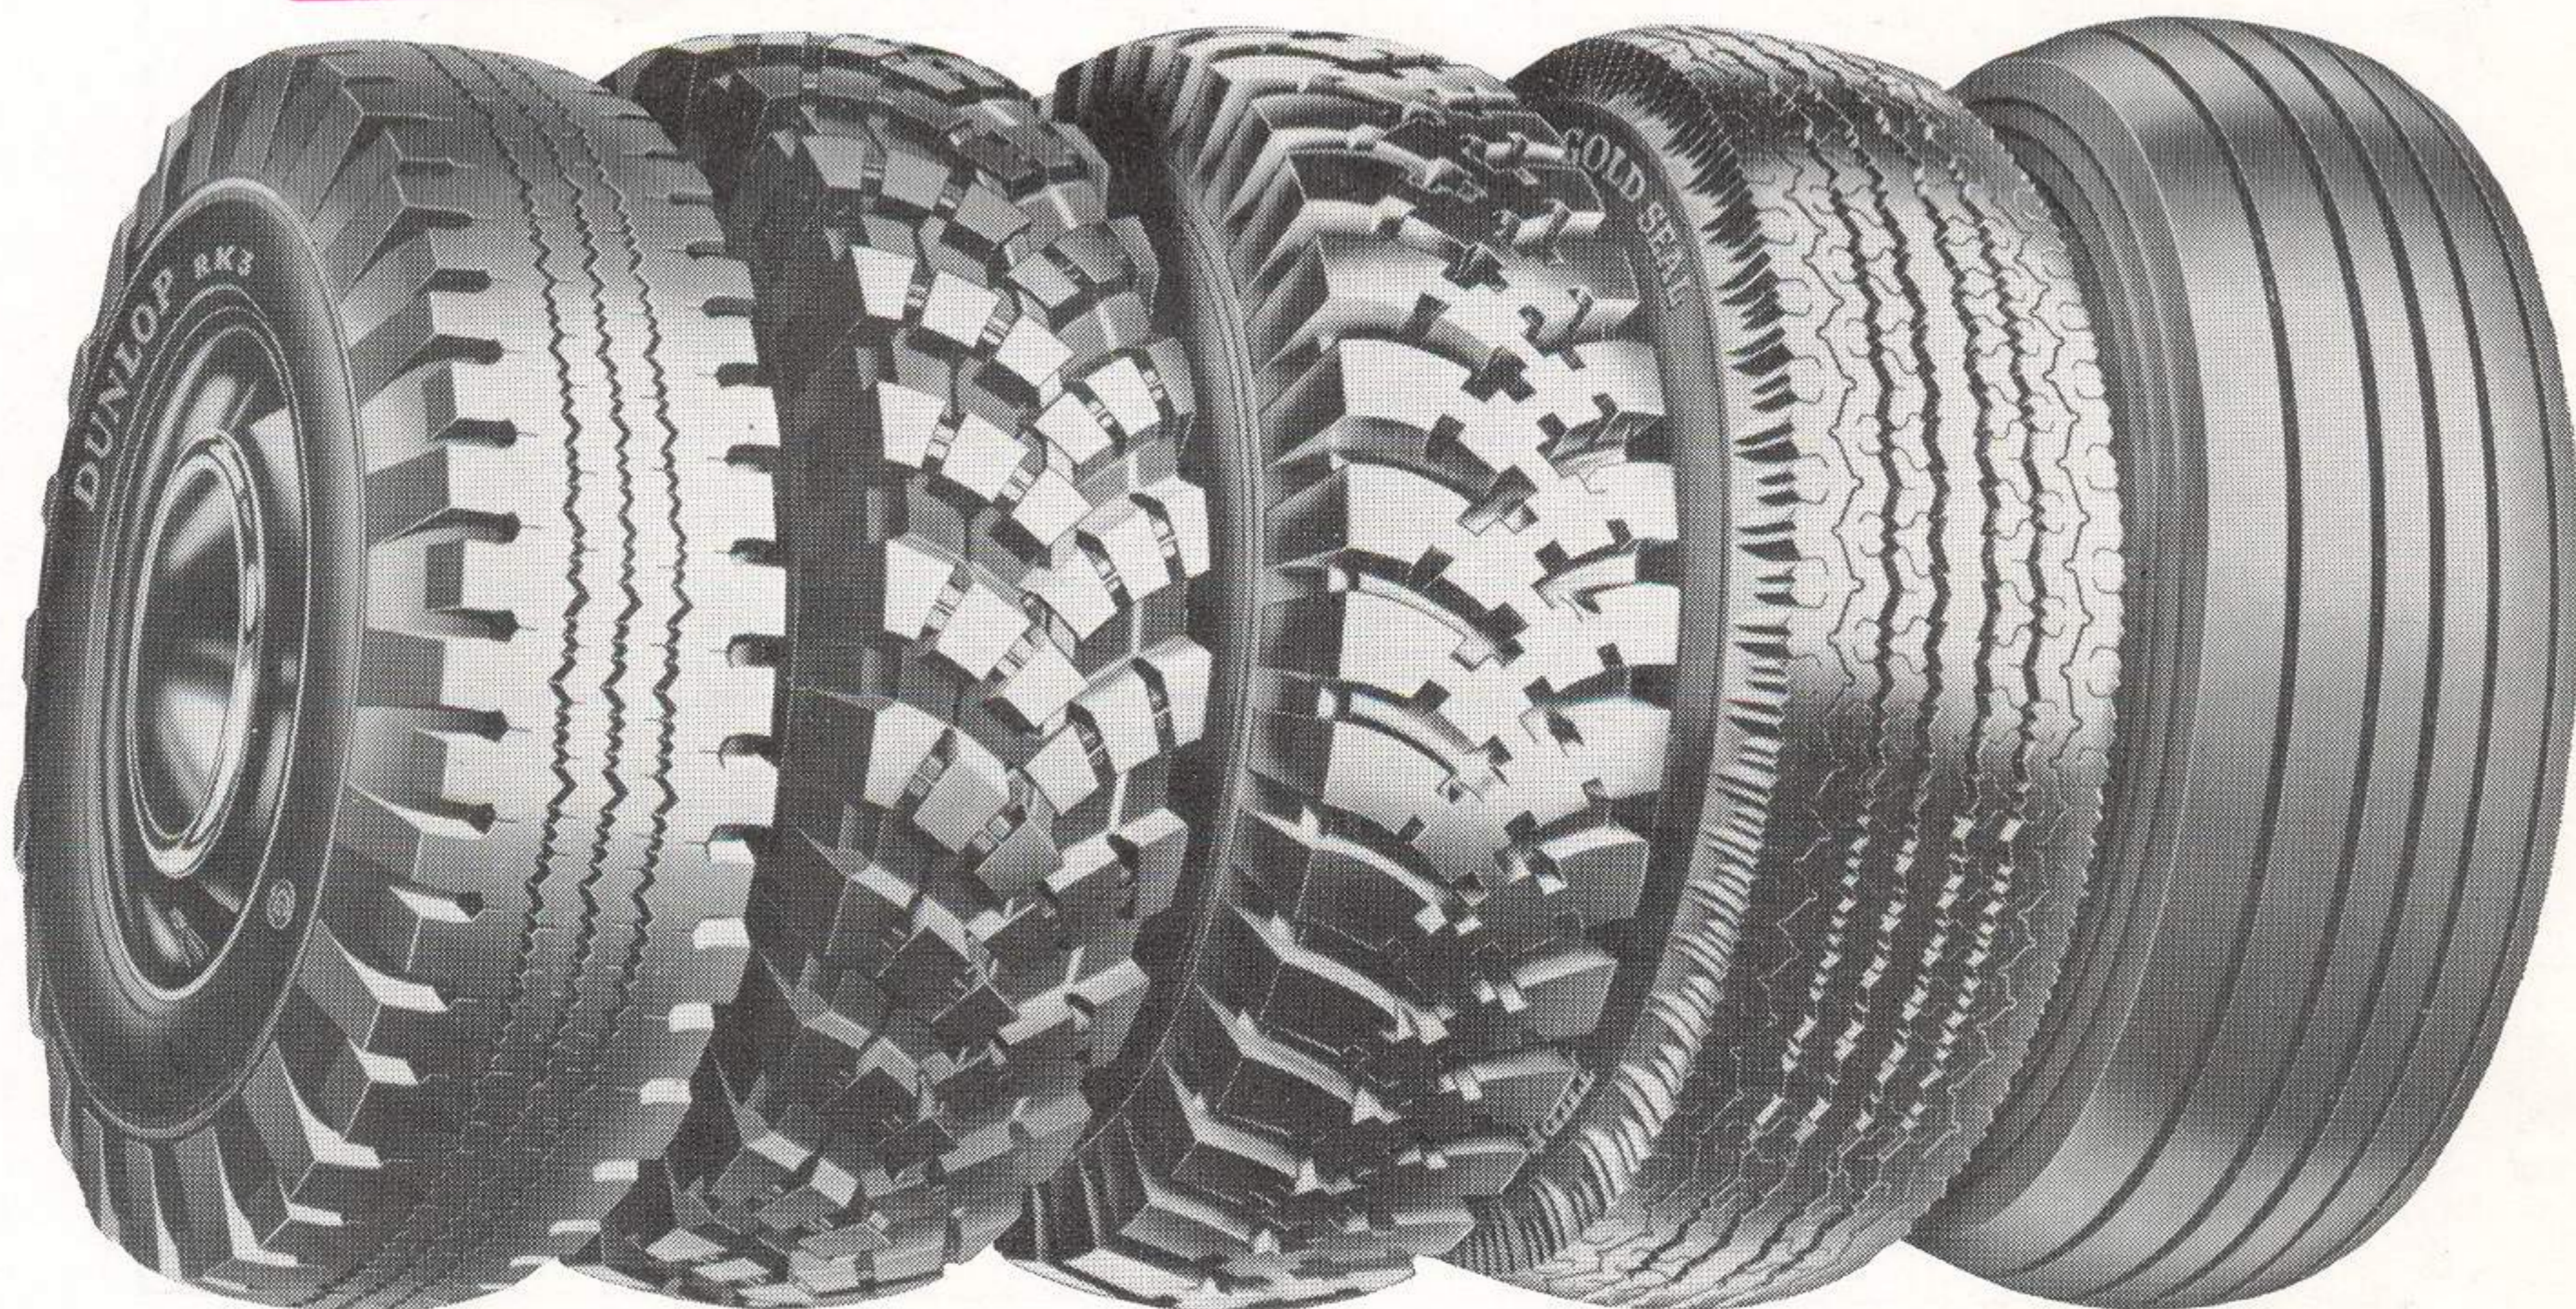
DUNLOP TYRES

THE AUTOMOBILE ASSOCIATION

RECEIVED
1 FEB 1960

TECHNICAL LIBRARY

FOR THE

As approved by The Rover
Co. Ltd. for use with the...**LAND-
ROVER**

RK.3

T.29a

T.28

DUNLOP GOLD SEAL
HEAVY DUTY 6-PLY RATING8.20-15
DUNLOP SAND TYRE

RK.3 TYRE

The standard equipment on the Land-Rover is Dunlop RK.3 pattern. It is available in sizes 6.00—16, 7.00—16 and 7.50—16. This is a general purpose tyre suitable in the main for all uses for which the Land-Rover was designed. It is intended for use both on the road and also off the road, but for certain special conditions, alternative equipment is available as follows:—

TRAKGRIP T.29a, T.28 TYRES FOR OFF THE ROAD SERVICE

When approximately 90% of service is off the road or work includes cross country towing where greater grip on unmade surfaces may be required, specify DUNLOP TRAKGRIP T.29A PATTERN TYRES which are available in sizes 6.50—16, 7.00—16 and 7.50—16 or DUNLOP TRAKGRIP T.28 PATTERN in size 6.00—16.

DUNLOP GOLD SEAL H.D. 6 PLY RATING TYRE FOR ON THE ROAD SERVICE

When service is exclusively on hard smooth surfaces, specify DUNLOP GOLD SEAL HEAVY DUTY 6 PLY RATING TYRES which are available in sizes 7.00—16 and 7.50—16.

DUNLOP SAND TYRE FOR SANDY DESERTS (Export only)

Under these conditions, minimum surface contact pressures are required. The 8.20—15 DUNLOP SAND TYRE has been designed specially for these conditions. DUNLOP GOLD SEAL HEAVY DUTY 6 PLY RATING TYRES can also be used.

DUNLOP RUBBER COMPANY LIMITED

FORT DUNLOP · ERDINGTON · BIRMINGHAM 24

THE MAINTENANCE OF CORRECT INFLATION PRESSURE IS VITAL

RECOMMENDED LAND-ROVER PRESSURES ARE:

MK. II "88" Fitting 6.00—16, 6.50—16 and 7.00—16 tyres.

Normal Road and Cross-Country Work 2 Passengers and up to 550 lb. (250 kg.) Payload Front and Rear.....	25 lb/sq. in. (1,75 Kg.cm ²)
Over 550 lb. (250 kg.) Payload Front Rear.....	25 lb/sq. in. (1,75 Kg.cm ²) 30 lb/sq. in. (2,10 Kg.cm ²)
Soft Ground use only 2 Passengers and up to 550 lb. (250 kg.) Payload Front Rear.....	15 lb/sq. in. (1,00 Kg.cm ²) 15 lb/sq. in. (1,00 Kg.cm ²)
Over 550 lb. (250 kg.) Payload Front Rear.....	15 lb/sq. in. (1,00 Kg.cm ²) 20 lb/sq. in. (1,40 Kg.cm ²)

MK. II "109" Fitting 7.50—16 tyres.

Normal Road and Cross-Country Work 2 Passengers and up to 550 lb. (250 kg.) Payload Front and Rear.....	25 lb/sq. in. (1,75 Kg.cm ²)
Over 550 lb. (250 kg.) Payload Front Rear.....	25 lb/sq. in. (1,75 Kg.cm ²) 36 lb/sq. in. (2,52 Kg.cm ²)
Soft Ground use only 2 Passengers and up to 550 lb. (250 kg.) Payload Front and Rear.....	12 lb/sq. in. (0,84 Kg.cm ²)
Over 550 lb. (250 kg.) Payload Front Rear.....	15 lb/sq. in. (1,00 Kg.cm ²) 24 lb/sq. in. (1,68 Kg.cm ²)

Recommended inflation pressures for 8.20—15 Sand Tyres are available from the addresses below.

To obtain good tyre wear, read the Tyre and Wheel Section in the Operational Manual.

If in doubt consult:—

either THE ROVER CO., LTD., Technical Sales Dept., Lode Lane, Solihull, Birmingham, England.

or **DUNLOP RUBBER CO., LTD.**, at:—

- (a) the nearest Depot at home or overseas.
- (b) Overseas Service Manager, St. James's House, 23/24 King Street, London, S.W.1 for overseas owners.