

Available from The Rover Co. Ltd.

for use with the . . .

MICHELIN

7.50-16 X Y and X S tyres





Michelin 7.50-16 X Y or X S tyres can be fitted to the Series II Land Rover, ex works, as optional extra equipment by customer request. If used on the Regular Series II, the Long Series II wheels, type 5.50F-16 must be used.



X Y



X S

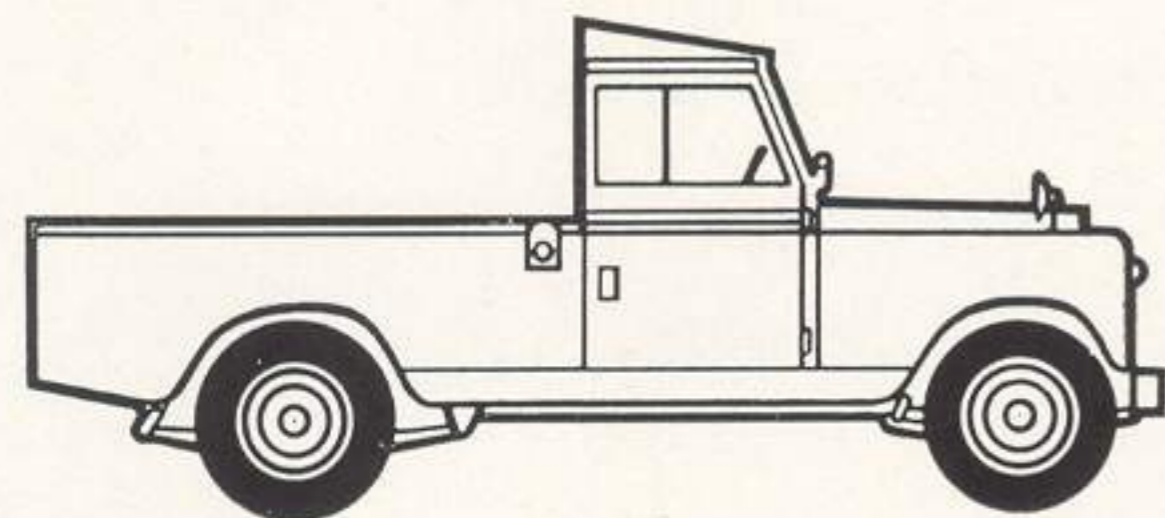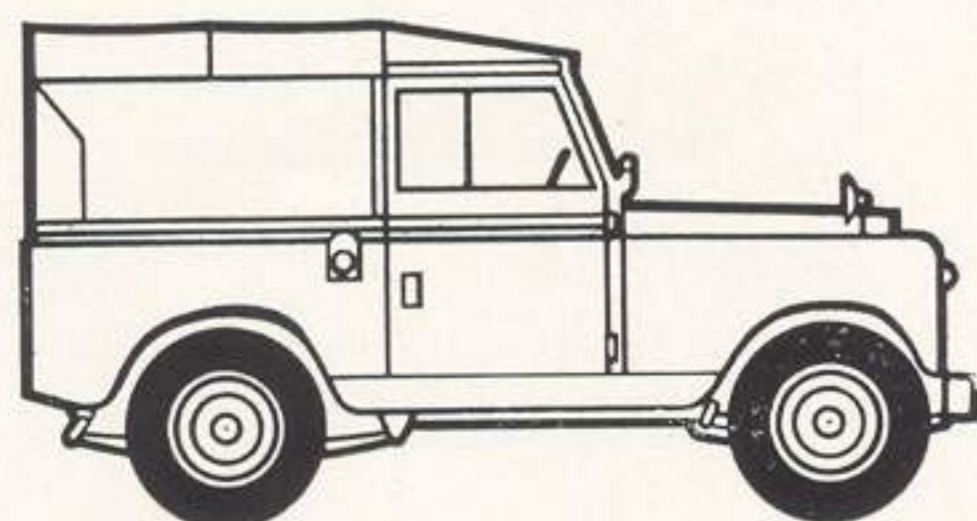

*for fitment details
please see overleaf . . .*

**X Y FOR MAINLY ON- AND OFF-THE-ROAD USE
X S FOR MAXIMUM TRACTION AND FLOTATION ON SOFT,
WET AND SLIPPERY SURFACES OR IN SAND**

TO OBTAIN THE BEST RESULTS IT IS ESSENTIAL TO USE THE RECOMMENDED PRESSURES

Those shown below are for most normal conditions of use. For very soft ground, including sand, requiring maximum flotation consult Michelin.

MICHELIN 7.50-16 X Y AND X S TYRES

REGULAR SERIES II

—Long Series II
wheels must
be used

LONG SERIES II

PRESSURES ACCORDING TO LOAD CARRIED (X TYRES ON ALL WHEELS*)				
LOAD CARRIED	FRONT		REAR	
	PSI	Kg/cm ²	PSI	Kg/cm ²
up to 550 lb (250 kg)	15	1.1	15	1.1
over 550 lb (250 kg)	15	1.1	25	1.8
up to 550 lb (250 kg)	20	1.4	20	1.4
over 550 lb (250 kg)	20	1.4	35	2.5

With X tyres the best front wheel alignment for Land Rovers is parallel to $\frac{1}{16}$ " toe-in.

MICHELIN 'AIRSTOP' tubes are fitted in X tyres. These butyl tubes have excellent air retention properties. Nevertheless, pressures should be checked at least once a month.

*If during the life of the vehicle tyres have to be changed, it should be remembered that X tyres should never be mixed with conventional tyres.

FOR FURTHER INFORMATION CONSULT

The Rover Co. Ltd., Technical Sales Dept., Lode Lane, Solihull, Birmingham, England

Michelin Tyre Co. Ltd., Technical Dept., Stoke-on-Trent or 81 Fulham Rd., London SW3 England